
Copied from an original at The History Center, Diboll, Texas. www.TheHistoryCenterOnline.com 2013:023

2C57

LUFKIN

DRY FREIGHT VANS

MODEL TFV
TANDEM FREIGHT VANS

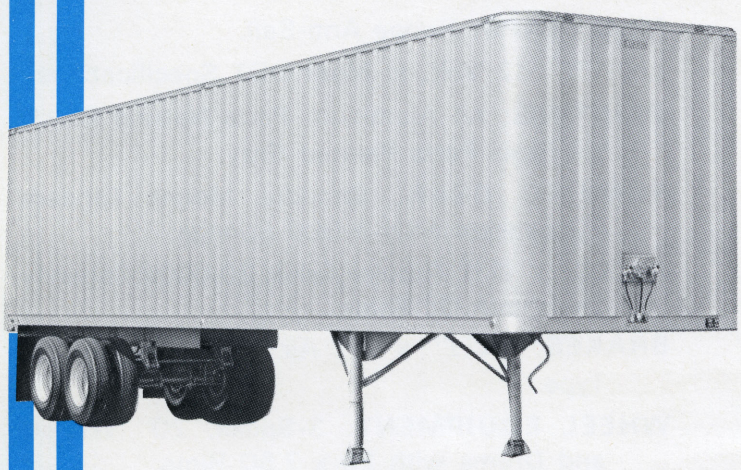


EXTERIOR POST MODEL
EP

The TFV Exterior Post Van is a picture of strength with aluminum hat section side posts on 16" centers, riveted to .050 thick side sheets. Extruded aluminum roof and chassis rails with strength factors that top the best in the industry, lend extra support to an already strong design. LUFKIN'S engineers have refined the design of the TFV Exterior Post Van to a point of maximum payload carrying capacity.

INTERIOR POST MODEL
IP

The TFV Interior Post Van is a product of the latest engineering techniques. LUFKIN's engineers through stress and strain calculations and tests have produced a well designed side section that resists racking and deflection. This extra strong side wraps to form the front corners and the nose giving the LUFKIN TFV Van a type of uni-body construction.

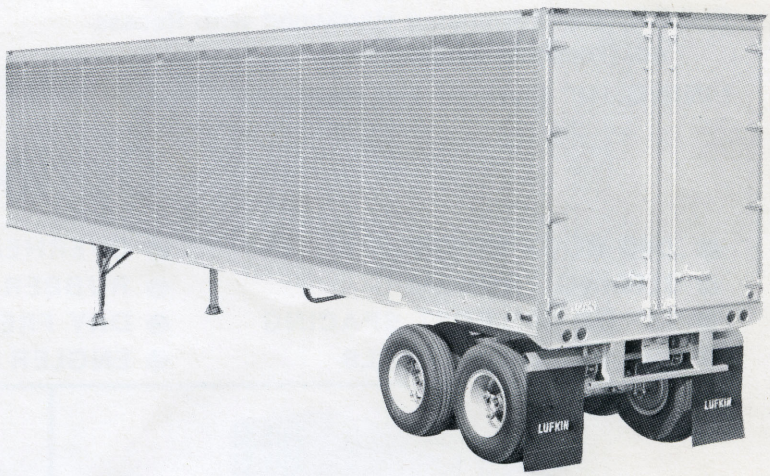

LUFKIN INDUSTRIES INC.
Trailer Division

U.S. 69 South
Lufkin, Texas

P.O. Box 848
75901

Branches And Sales Offices

Atlanta
Birmingham
Charlotte, N.C.
Dallas
Houston
Jackson
Lubbock
Memphis
New Orleans
Oklahoma City
San Antonio
Shreveport

Copied from an original at The History Center, Diboll, Texas. www.TheHistoryCenterOnline.com 2013:023

LUFKIN

DRY FREIGHT VANS

General Specifications

MODEL TFV Interior and Exterior Post

LENGTH: 35′ Through 45′ Standard.

WIDTH: 96″ Overall.

HEIGHT: 96″ Minimum, 108″ Maximum.

ROOF: One Piece .032 Aluminum Skin.

NOSE: Flat with .050 Aluminum Sheets and Six Aluminum Posts.

SIDES: 050 Aluminum Sheets with Aluminum Posts on 16″ Centers. I.P. Side Sheets Corrugated on 2″ Centers.

CROSSBEARERS: 4⅛″ Deep Steel I-Beams on 12″ Centers.

REAR DOORS: Pre-Painted Plymetal Sealed with Extruded Vinyl Weather Seal and Hung by Four Hinges each Side.

FLOOR: 1⅛″ Laminated Hardwood with Recessed Threshold Angle.

LINING: ¼″ Plywood Full Height over Posts.

REAR BUMPER: Meets DOT Requirements.

LANDING GEAR: Vertical Round Legs 2-Speed, with Standard 10″ x 10″ Sand Shoes.

MUD FLAPS: Roppe Anti-Sail.

LIGHTS: 12 Volt, to Meet DOT Specifications.

PAINTING: All Aluminum Parts Natural Finish, All Steel Parts Painted Gray.

RUNNING GEAR: Straddle Mount Tandem Suspension with 3-Leaf Springs.

AXLES: 5″ O.D. Tubular Axles, 20,000# Capacity Each with Oil Seals.


BRAKES: 16½″ x 7″ Air Actuated, S-Cam Type.

WHEEL EQUIPMENT: 3-Spoke, 20″ Wheels and Drums with 20 x 7.50 Rims.

TIRES: 10:00 x 20 12-Ply Nylon Tires with Tubes and Flaps.

Options

- .040 ROOF SHEET
- SLIDING TANDEM
- 12″ OR 24″ POST SPACING
- PRE-PAINTED PANELS
- OVERHEAD REAR DOOR
- RUBBER BUMPER BLOCKS
- DRY FREIGHT VENT DOORS
- ENGLER HUBODOMETER
- SKYLIGHTS
- SIDE DOORS
- DOME LIGHTS
- TIRE CARRIERS

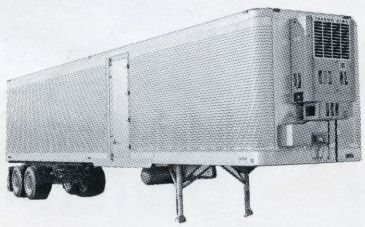


INSULATED AND REFRIGERATED VANS



DOUBLES



EP VAN WITH SIDE DOOR AND SLIDING TANDEM



OPENTOP VAN

LUFKIN TRAILERS