Copied from an original at The History Center, Diboll, Texas. www.TheHistoryCenterOnline.com 2013:023

2C55

LUFKIN

PLATFORM TRAILERS



Model THT · 60

60,000 LB. CAPACITY

This trailer is designed for general purpose hauling. The "60" is the product of customer requirements and many years of trailer design and testing. It is lightweight and dependable.

Model THT · 75

75,000 LB. CAPACITY

This trailer is designed for heavy duty hauling of both concentrated and uniformly distributed payloads over the highway. It is designed for the customer with special hauling requirements.

LUFKIN INDUSTRIES INC.
Trailer Division

U.S. 69 South
Lufkin, Texas

P. O. Box 848
75901

Branches And Sales Offices

Atlanta
Birmingham
Charlotte, N.C.
Dallas
Houston
Jackson
Lubbock
Memphis
New Orleans
Oklahoma City
San Antonio
Shreveport

Copied from an original at The History Center, Diboll, Texas. www.TheHistoryCenterOnline.com 2013:023

LUFKIN

PLATFORM TRAILERS

General Specifications

THT·60 and THT·75

LENGTH: 32′ through 45′ Standard.

WIDTH: OVERALL: 96.″

MAIN FRAME: Fabricated High Tensile Wide Flange Beam.

SIDE FRAME: 8″ Deep Structural Channel.

CROSSBEARERS: 6″ x 1-7/8″ - 4.4# Mild Steel Junior I-Beams.

STAKE POCKETS: Spaced on 24″ Centers. 1-5/8″ x 3-3/4″ x 4″ Deep Straight Pockets.

RUBRAIL: 5/16″ x 3″ Steel Flat Bar.

REAR BUMPER: 3-1/2″ Extra Strong pipe to meet DOT Specifications.

LANDING GEAR: Austin Vertical Round Leg 2-Speed Steel Gear with Standard 10″ x 10″ Sand Shoes.

TIRE CARRIER: Single Basket type.

MUD FLAPS: Roppe Anti-Sail.

SUSPENSION: Hutchens H7700 Straddlemount Tandem Suspension with H354 3-Leaf Springs.

AXLES: A22S Standard Forge, 20,000# Capacity each, with Stemco Oil Seals.

BRAKES: 16-1/2″ x 7″ Air

WHEEL EQUIPMENT: 3-Spoke, 20″ Webb Wheels and Drums with 20 x 7.50 Rims.

TIRES: 10.00 x 20 12-ply Nylon.


FLOOR: 1-1/2″ S4S Penta Treated Pine.

LIGHTS: To meet DOT Specifications.


PAINTING: Red Standard. Shot Blasted, primed and color coat baked on in drying oven.

Options


- 48″ HIGH BULKHEAD
- GRAIN BOARDS
- FOLD BACK LDG./GEAR
- HALF PIPE (FRONT OR REAR)
- 3/8″ x 3″ RUBRAIL
- SLIDING TANDEM
- OILFIELD BUMPER
- SQUARE FRONT
- OUTRIGGER BRACES
- ROLLING TAILPIPE
- APITONG FLOORING
- TOOL BOXES

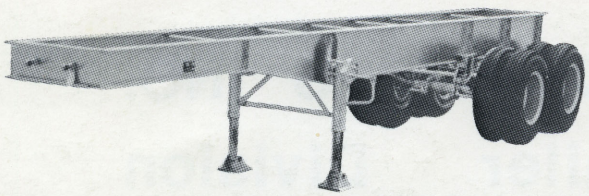


Trailer Chassis

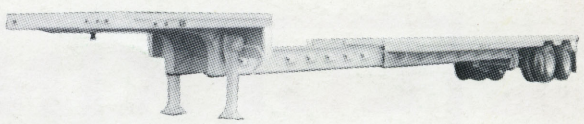

Drop Frame Extendable

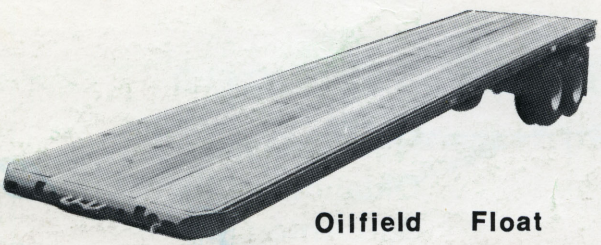

Oilfield Float

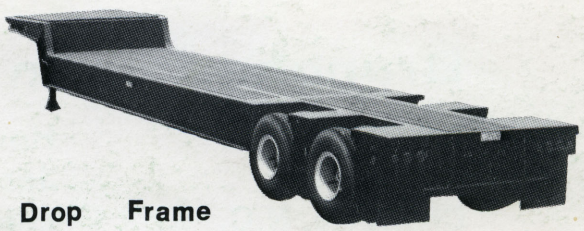

Drop Frame

LUFKIN TRAILERS